






Create an entrance


Clear the floor for the next generation of Camaro, the leading LVT brand continues to evolve. Conceived using the latest market innovation and advanced product technology, Polyflor introduces Camaro Rigid Core. Combining style with enhanced durability, Camaro Rigid Core is specially engineered with a **Stone Polymer Composite (SPC)** construction providing supreme strength with ultra-hard wearing properties.

The rigid construction can be laid over most existing floor coverings, significantly reducing installation time and making it a firm favourite with busy, fast paced lifestyles.

With 3 striking formats to choose from, Camaro Rigid Core makes stunning design easy to achieve straight from the box.









WHY CHOOSE CAMARO RIGID CORE?

The new multi-layered vinyl planks and tiles are designed to fuse supreme strength with ultimate comfort. Each individual layer provides a unique benefit.

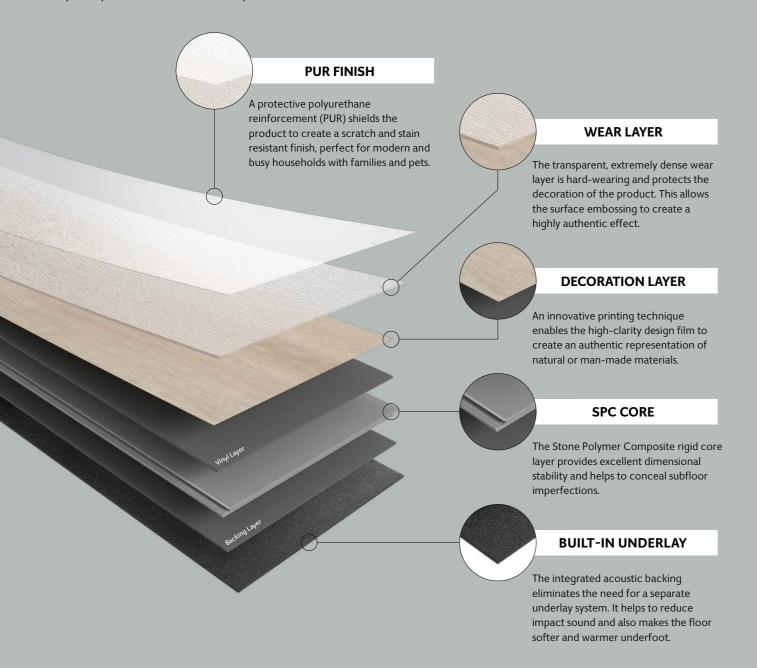

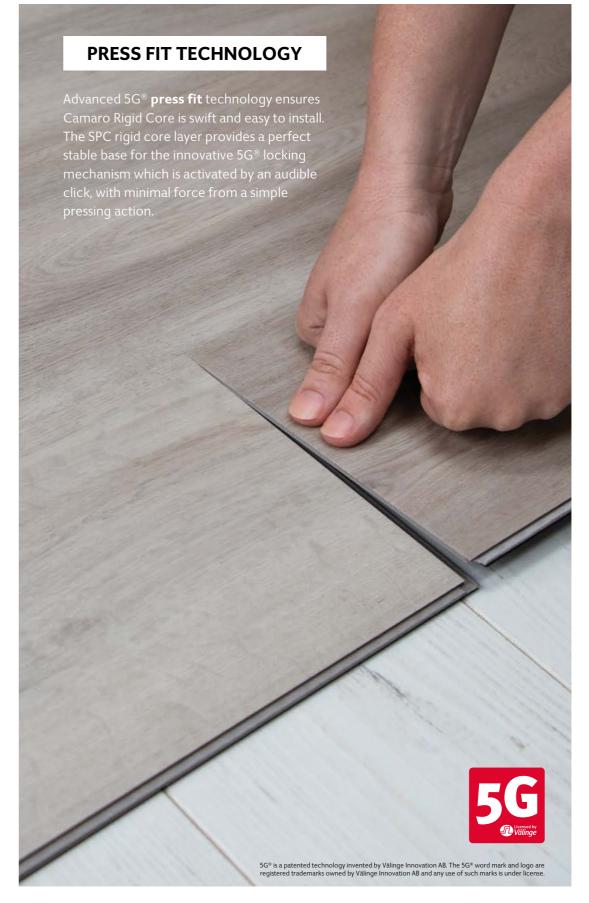



QUICK & EASY INSTALLATION



PRESS FIT 5G®
LOCKING MECHANISM



100% WATERPROOF



STRONG & DURABLE SPC CONSTRUCTION



SUITABLE FOR UNDERFLOOR HEATING - MAX 27°C



NO ADHESIVE OR UNDERLAY REQUIRED



CAN BE LAID OVER EXISTING SUBFLOORS



ACOUSTIC IMPACT SOUND REDUCTION 18dB





Herringbone Plank size: 101.6 x 609.6mm



Plank Plank size: 177.4 x 1212.4mm



Visualise any of the Camaro Rigid Core range now. Visit polyflor.com/visualiser





Herringbone See page 20

Plank

See page 44


See page 42







4146 Fenland Oak

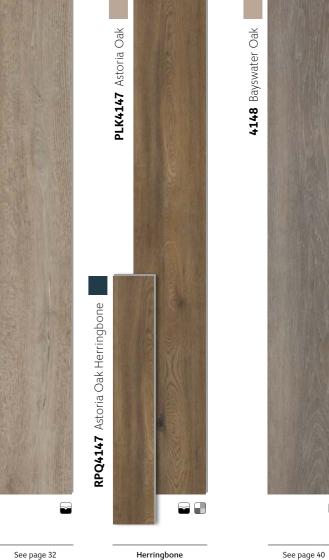

See page 18

Plank


See page 29

See page 30



See page 46

STONE COLLECTION



Tile

Tile size: 304.8 x 609.6mm





Visualise any of the Camaro Rigid Core range now. Visit **polyflor.com/visualiser**



For added peace of mind, Camaro Rigid Core is covered by our 10 year residential guarantee against manufacturing defects.

OUR PROMISE TO YOU

We understand the importance of choosing the perfect flooring for your home, but also for your lifestyle. That's why Camaro Rigid Core has been developed to meet the highest technical specification of its product type. Tried and tested, it is suitable for all areas of the home and our product boasts ultimate performance with exquisite style.

Compared with many natural flooring options, Camaro Rigid Core will under normal conditions resist household stains and will not crack, chip or splinter. The manufacturers of Camaro Rigid Core are confident that their high quality products will provide many years of valuable service. All products purchased from the range are guaranteed for 10 years against normal wear and tear in the recommended environment, provided that they have been fitted correctly and maintained in accordance with the manufacturer's instructions. Full terms and conditions of the guarantee are available on request from your flooring wholesaler or Polyflor Ltd.



Herringbone

Thanks to its timeless appeal, herringbone floor design is more popular than ever. A herringbone floor is the perfect solution to bring symmetry and balance to an interior scheme, as well as offering space enhancing benefits by giving the illusion of larger rooms. Each herringbone design in the Camaro Rigid Core collection has been expertly developed to replicate authentic wood grain texture, combined with mutli-tonal variation for added movement, character and depth within your herringbone floor.

Herringbone


Plank size: 101.6 x 609.6mm









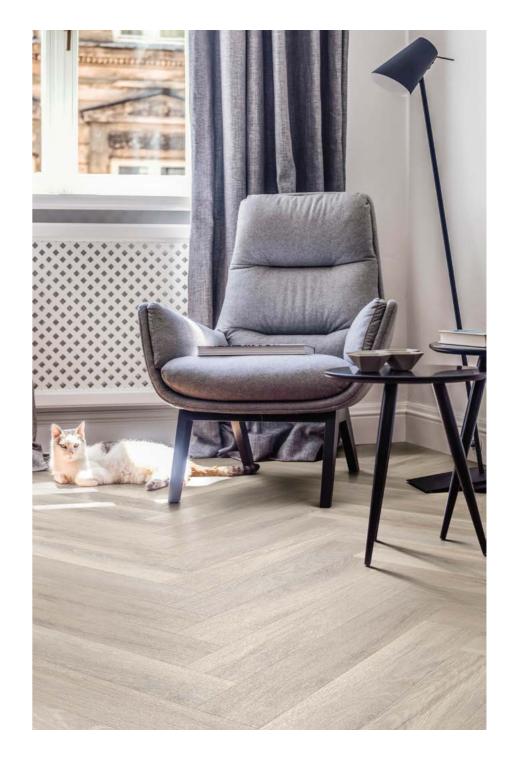

RPQ4147 Astoria Oak Herringbone

Rich oaks are ideal for a timeless design scheme which will look good today and for many years to come. Simple yet sophisticated, they blend seamlessly with all areas of the home. We've laid this striking design in a light and bright interior, allowing the herringbone floor to take centre stage.

This design features a micro bevel

This design features high shade variation















Beauty and practicality are the central focus of Camaro Rigid Core's plank designs. Each shade has been carefully developed to create a balanced and inviting palette. From classic wood grain with authentic appeal, to paler, fresh and more neutral canvases for effortless contemporary style, the enduring beauty of planks will bring natural style to your home. Browse through our inspirational imagery to help envisage the beautiful designs in your home, there is a shade to complement any interior scheme.




































PLK4147 Astoria Oak



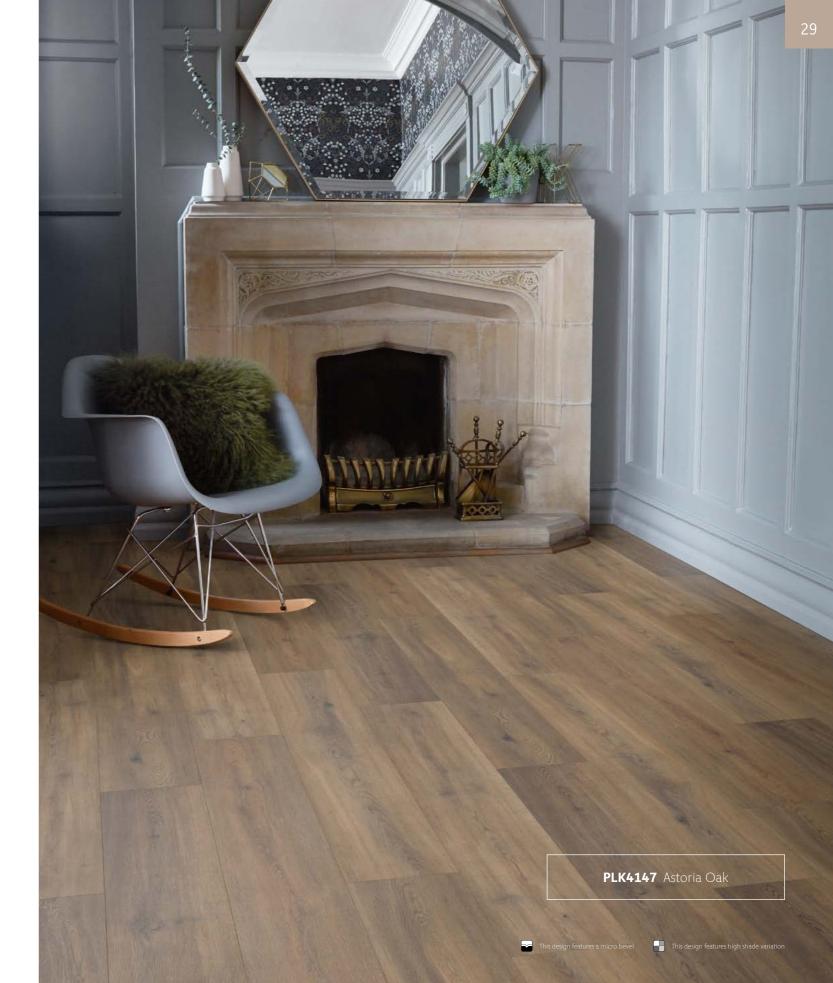







This design features a micro bevel











PLK4144 Naked Blond Oak

Colour plays a key part in the calming or energising feel to a space. Exquisite in appearance, blond oaks also help to evoke a feeling of calm and serenity. The neutral tones and linear grain of Naked Blond Oak seamlessly complement an assortment of interior styles - we've shown this design in a cosy bedroom. Pastel colours paired with simple, soft accessories create the perfect bedroom oasis.



This design features a micro bevel

This design features high shade variation







This design features a micro bevel







PLK4141 Westchester Oak

Westchester Oak is a soft grey design which blends effortlessly with interiors to create a stunning minimalist look. Subtle wood knots and grains are present in the design which add further authenticity and character to the floor. We've laid Westchester Oak in an open plan area to allow greater light reflection across the surface of the floor - it is a fabulous shade to create the illusion of larger spaces!



This design features a micro bevel












Tile

Tile size: 304.8 x 609.6mm

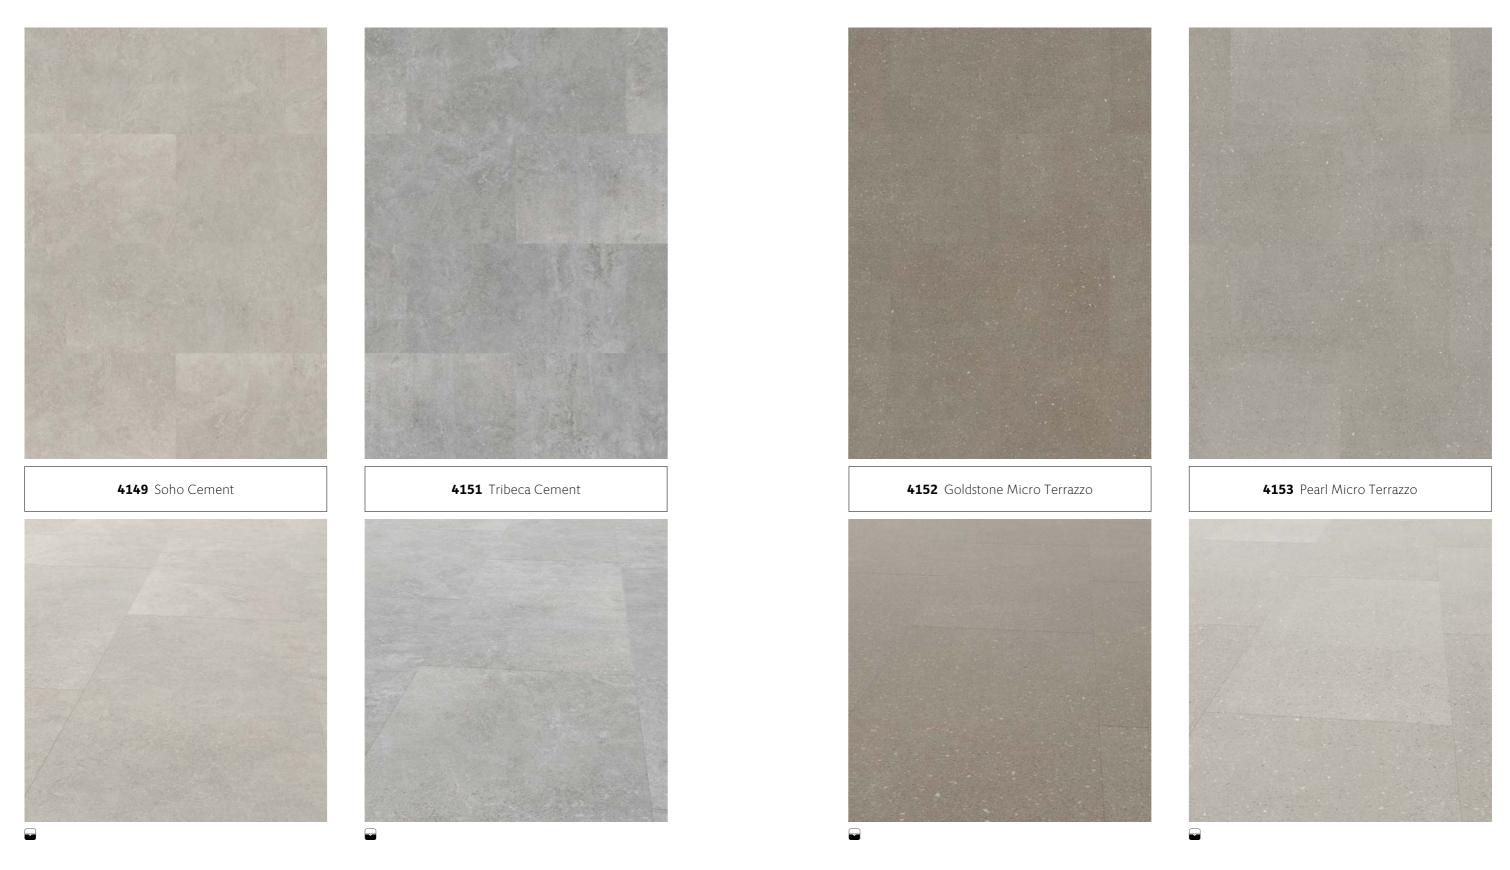



This design features a micro bevel

West Didsbury






This design features a micro bevel





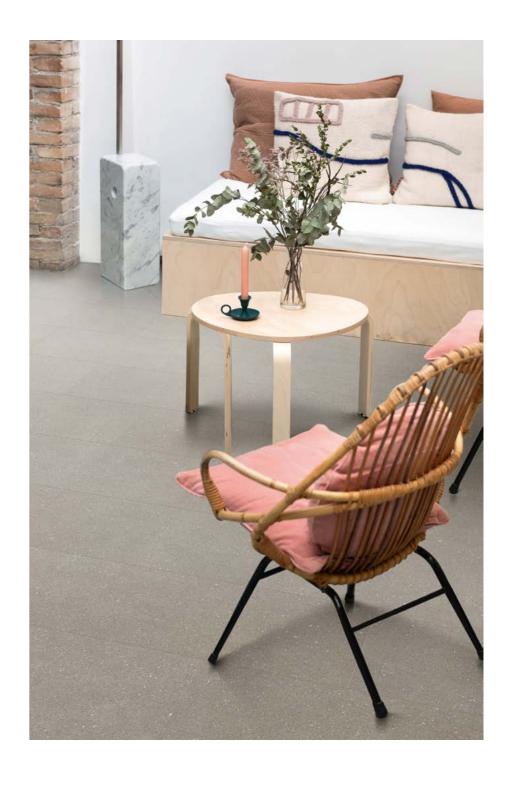

5 STEP GUIDE

TO YOUR PERFECT FLOOR



1 BE INSPIRED

The first stage of designing an interior is refining your ideas and planning your finished look.



3 ORDER FREE SAMPLES

Free samples of each shade are available to order through our website **polyflor.com** or call the dedicated Polyflor Samples Hotline on **+44 (0)161 767 2551.**



5 ENJOY YOUR NEW FLOOR

We want you to enjoy your floor for years, so we have prepared a list of top tips to help you keep your floor looking as good as new, see full brochure for more details.



2 SELECT YOUR FLOOR

Browse our brochure, shadecards and retail presenters at your leisure and make a shortlist of your favourite designs.

Our room visualiser is also available to help you picture any design instantly, in every room of your home.



4 DISCUSS YOUR PROJECT

It is always useful to be prepared when visiting your local flooring retailer. Start by providing a rough guide of the room shape and measurements. Be sure to bring your shortlist of chosen designs, including shade name and number.

PICTURE IT INSTANTLY IN YOUR HOME

SEE OUR FLOORS IN YOUR SPACE

Simply take a photo of the area you are renovating and select your new floor at the touch of a button.

Visualise any of the Camaro Rigid Core range now. Visit **polyflor.com/visualiser**







FLOORCARE

We want your Camaro Rigid Core floor to look its best for many years to come and to help you achieve this we have laid out the following floorcare guidelines. Camaro Rigid Core does not harbour dust mites or bacteria making it ideal for the home environment.

Every design in the Camaro Rigid Core collection features a polyurethane reinforcement (PUR) surface treatment to provide protection against everyday wear. We do however propose the following floorcare guidelines to help you keep your floor looking its best.

Initial Clean

We recommend you sweep or vacuum to prevent loose dirt or grit from scratching the floor. Polishing your floor can also be beneficial to help prevent slight surface scratches and to provide further protection.

Day to day cleaning

Regularly sweep or vacuum your floor to remove loose dirt, grit or dust. It's important to use clean mops and neutral cleaning solutions to regularly clean your floor. You should always dilute the floor cleanser to the manufacturer's instructions.

Please ensure you mop your floor evenly and collect any excess liquid in a mop bucket. Rinse the floor with clean water and allow to dry.

Regular cleaning is more beneficial to the floor covering and is more cost effective than occasional heavy cleaning.

Do

- ✓ Install barrier mats at entrances to pick up grit and moisture. (Please note, some rubber-backed mats may discolour the floor)
- ✓ Ensure your furniture is fitted with protective pads where necessary to prevent scratches.
- ✓ Use protective cups under heavy furniture to prevent indentation.
- ✓ Remove spillages as quickly as possible to reduce risk of staining and causing slip hazards.
- ✓ Always use clean equipment when maintaining your floor.
- ✓ Regularly trim pets claws as these can cause fine scratches.

Don't: X Use abrasive liquids or metal scouring pads as these can damage the floor.

- Clean the floor with solvents, caustic detergents, washing up liquids, soap powders, bleach, furniture polishes, petroleum based products, pine gels, stain removers or highly coloured products. Such products may make the floor slippery or cause permanent damage.
- X Drag furniture with unprotected feet across the floor.



BEAUTIFULLY SUSTAINABLE

The increased awareness of sustainable development is a key aspect of manufacturing and as such, Camaro Rigid Core is 100% recyclable, contains an average of 15% recycled content and can be recycled through Polyflor's recycling scheme, Recofloor.

Polyflor floor coverings contain a combination of ingredients which are clean, natural and recycled for a more sustainable end product. The materials we use in our flooring are responsibly sourced and regularly audited for our BES 6001 certification.


Camaro Rigid Core is a sensible choice and contributes positively to indoor air comfort and quality, it is certified by Indoor Air Comfort Gold and FloorScore® as extremely low VOC. Additionally, Camaro Rigid Core is an interlocking product and as a result, requires no adhesive - its environmental impact is further reduced, benefitting air quality and recyclability.

Polyflor is certified to ISO 14001 and ISO 9001 ensuring the best environmental and quality management systems. What's more, Polyflor has achieved SA 8000 approved factory status, providing social accountability throughout our manufacturing processes.

Choose Polyflor for zero compromise on style, function and the environment.

For further details on Polyflor's achievements in areas such as recycling, energy reduction and waste avoidance visit **polyflor.com/sustainability**

























INSTALLATION

To guide you through the process of installing Camaro Rigid Core Herringbone, we have created how to lay Herringbone correctly.

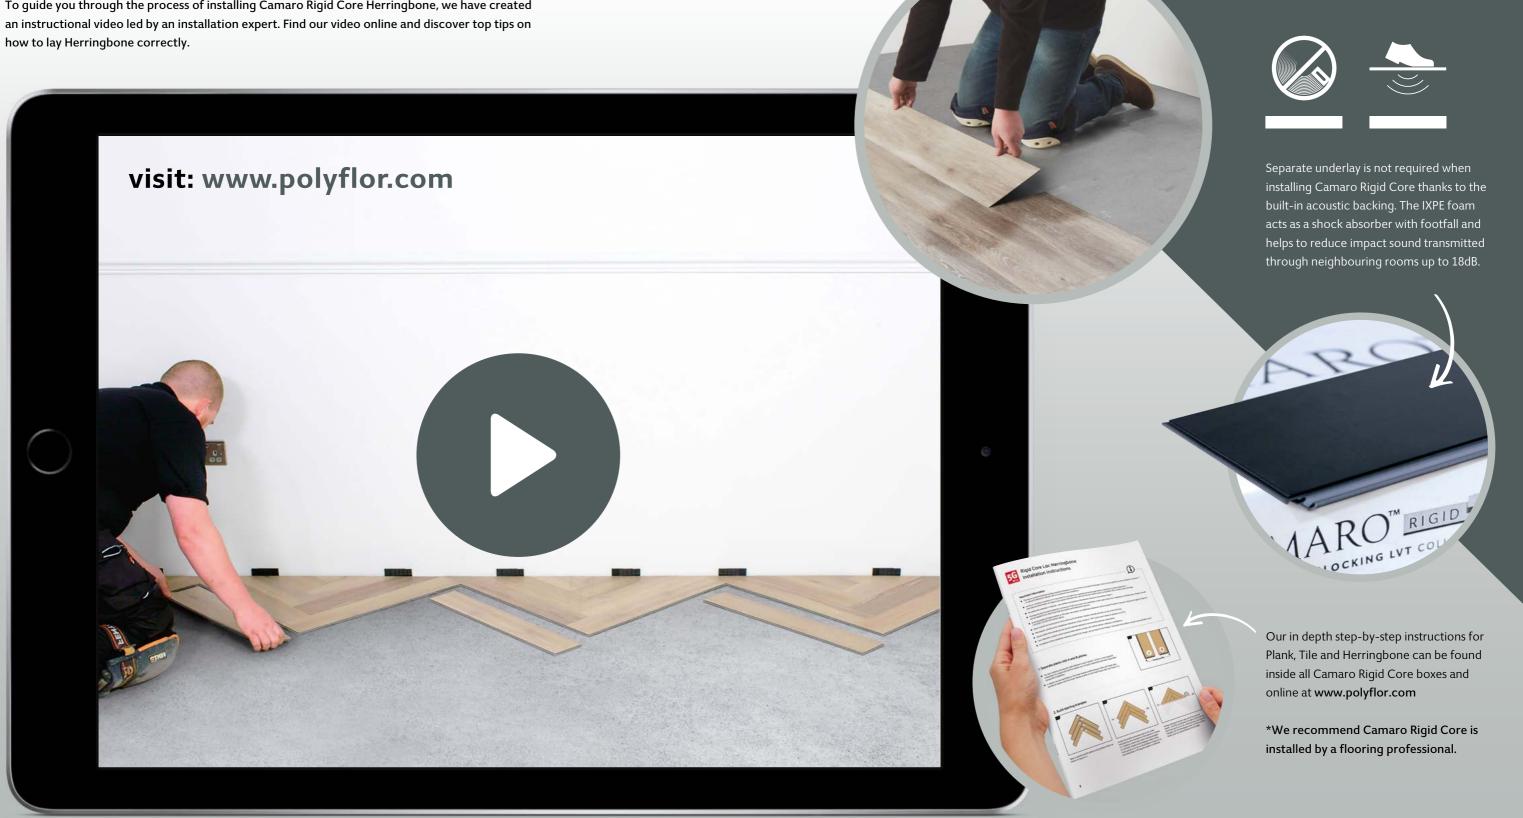

TECHNICAL SPECIFICATION



Polyurethane Reinforcement (PUR)

The PUR treatment supports a simple cleaning regime.

2 Clear Embossed Wear Layer

The transparent, extremely dense layer is hard-wearing and protects the decoration of the product. This allows the surface embossing to create a highly authentic effect.

(3) The Decoration Layer

An innovative printing technique makes the high-clarity design film a true representation of natural materials.

4 Vinyl Layer

A stable and durable layer enabling highly detailed emboss textures in the products surface.

5 SPC Rigid Core Layer

The rigid core layer provides excellent dimensional stability and is a strong stable base for the innovative 5G locking mechanism which allows for quick and easy installation.

6 Backing Layer

A durable layer with high resistance to pressure.

7 Acoustic Backing

The pre-applied acoustic backing eliminates the need for a separate underlay system and helps reduce impact sound and make the floor softer and warm underfoot.

If you require any further information contact Polyflor Customer Technical Services on +44 (0) 161 767 1912, or email tech@polyflor.com

| Plank & Tile Sizes | Size | Shades | Quantity per Box | Coverage per Box |
|--------------------|------------------|--------|---------------------|---------------------|
| Plank | 177.4 x 1212.4mm | 10 | 10 | 2.15m ² |
| Herringbone | 101.6 x 609.6mm | 4 | 24 | 1.48m² |
| Tile | 304.8 x 609.6mm | 4 | 12 | 2.22m² |

| Product Format | Standard | Result |
|---------------------|--------------------|-------------|
| Gauge | ISO 24337 (EN 428) | 5.5mm |
| Wear Layer | ISO 24340 (EN 429) | 0.3mm |
| IXPE Acoustic Layer | | 1mm |
| Joint Profile | | Välinge 5G® |
| Total Weight | ISO 23997 (EN 430) | 8570g/m² |
| Finish | | PUR |

| Performance Requirements | Standard | Result |
|------------------------------|------------------------------|--------------------------------------|
| General Performance | EN 16511 | Conforms |
| Use Area | ISO 10874 (EN 685) | 23, 31 |
| Slip Resistance* | EN 13893 DIN 51130 | Class DS R10 |
| Abrasion Resistance | EN 15468 Annex A | ≥7000 cycles |
| Reaction to Fire | EN 13501-1 CAN/ULC S102.2 | Class BfI-S1 FSV < 300; SDV < 500 |
| Static Electrical Propensity | EN1815 | ≤2kV Classified as 'antistatic' |
| Residual Indentation | ISO 24343-1 (EN 433) | ≤0.1mm |
| | | |

| Castor Chair (continuous use) | ISO 4918 (EN 425) | Suitable |
|----------------------------------|--------------------|---|
| Impact Resistance | EN 13329 Annex F | Pass ≥1800mm |
| Dimensional Stability | ISO 23999 (EN 434) | ≤0.1%** |
| Underfloor Heating | EN 12664 | Suitable, max 27°C |
| Light Fastness | ISO 105-B02 | (Method 3) >6 |
| Furniture Leg | ISO 16581 (EN 424) | Pass (no visible damage) Foot type O |
| Swelling | ISO 24336 | Pass (0.0%) |

| Sustainability | Standard | Result |
|----------------------------|--------------------|----------------------------|
| Recyclable | | 100% |
| Recycled Content | | 15% |
| Indoor Air Comfort Gold | | Eurofins certified product |
| FloorScore | | Certified |
| AgBB/ABG | | Pass |
| Afsset | | A+ |
| Responsible Sourcing | SA 8000 | Approved factory |
| Acoustic Performance | Standard | Result |
| Impact Sound Reduction | ISO 10140-3 | 18dB |
| Maintenance Performance | Standard | Result |
| Resistance to Chemicals | ISO 26987 (EN 423) | Good resistance*** |

ORDER SAMPLES

We highly recommend you view an original sample of your favourite designs, which is why we offer a complimentary sample service.

Visit our website or call the dedicated Polyflor Samples Hotline on +44 (0)161 767 2551

TECHNICAL SUPPORT

For general information on your specific project, speak with your local Camaro Rigid Core provider.

If you require specific detailed technical data, contact
Polyflor Customer Technical Services on
+ 44 (0)161 767 1912 or email tech@polyflor.com

WWW.POLYFLOR.COM

info@polyflor.com

 $^{{}^{\}star}\, For\, Safety\, flooring\, with\, sustainable\, slip\, resistance, refer to\, Polysafe\, ranges.$

 $[\]ensuremath{^{**}}$ Average test value from current production.

^{***} Resistant depending on concentration and time of exposure, in case of increased impact of oils, grease, acids and alkalis and other agressive chemicals - please contact us.



POLYFLOR™ INTERNATIONAL

Australia

Polyflor Australia Tel: 1800 777 425 E-mail: sales@polyflor.com.au

Canada

Polyflor Canada Inc. Tel: +1 905 364 3000 E-mail: sales@polyflor.ca

China

Polyflor Hong Kong O/B Polyflor Ltd. Tel: +(852) 2865 0101 E-mail: info@polyflor.com.hk

Colombia

Polyflor Ltd. (LATAM Office) Tel: +57 (601) 7431965 E-mail: info@polyflor.com

France

James Halstead France SAS Tel: +33 (0)8 20 20 32 11 E-mail: info@jhfrance.fr

Germany

objectflor Art und Design Belags GmbH Tel: +49 (0) 2236 966 330 E-mail: info@objectflor.de

India

Polyflor India Pvt Ltd. Tel: +91 22 4023 2485 E-mail: info@polyflor.co.in

Ireland

Polyflor Ireland

Tel: +353 (1) 864 9304 E-mail: salesireland@polyflor.com

Malaysia

Polyflor Martex Tel: 1300 80 7788 E-mail: sales@polyflor.com.my

Middle East

Polyflor FZE Tel: +971 50 406 8114 E-mail: aelwakil@polyflorfze.ae

New Zealand

Polyflor New Zealand Ltd. Tel: 0800 765 935 Tel: +64 9 269 1111 E-mail: sales@polyflor.co.nz

Norway

Polyflor Nordic Tel: +47 23 00 84 00 E-mail: firmapost@polyflor.no

Poland

Polflor Sp. Z.o.o Tel: +48 (0) 61 820 3155 E-mail: polyflor@polflor.com.pl

South Africa

Poly Sales Africa (Pty.) Ltd. Tel: +27 (0) 11 609 3500 E-mail: info@polyflor.co.za

Spain

Polyflor Ltd. Tel: +34 619 949 054 E-mail: info@polyflor.com

Sweden

FalckDesign AB Tel: +46 (0) 300 15820 E-mail: info@falckdesign.com



$\mathsf{POLYFLOR}^{\scriptscriptstyle{\mathsf{TM}}}\,\mathsf{UK}$

Polyflor Ltd. PO Box 3, Radcliffe New Road, Whitefield, Manchester, M45 7NR

Tel: +44 (0) 161 767 1111 E-mail: info@polyflor.com

www.polyflor.com



